

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/004921 A1

(51) International Patent Classification⁷: B05B 11/00

(74) Agent: TABELING, Marcella, Maria, Josefa; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).

(21) International Application Number:
PCT/NL2003/000493

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 3 July 2003 (03.07.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): KELTUB B.V. [NL/NL]; Wolput 39, NL-5251 CC Vlijmen (NL).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM OF BELLows AND CO-ACTING PART, PUMP AND METHOD FOR THE USE THEREOF

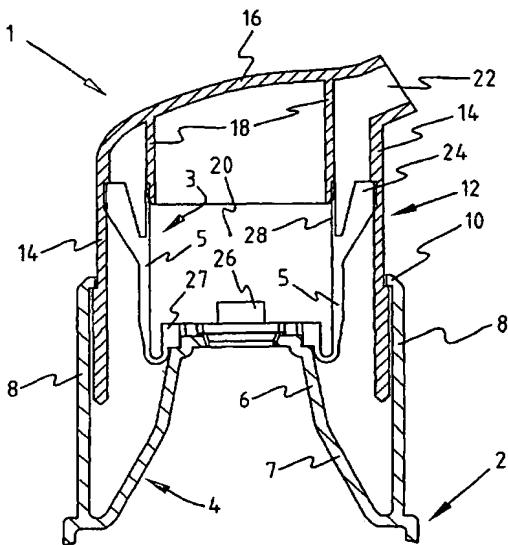

WO 2004/004921 A1

(57) Abstract: The present invention provides an assembly of bellows part and a part against which unrolling takes place (the unrolling part), comprising a bellows part with a flexible wall of a predetermined shape and thickness variation which co-operates with an unrolling part with a stiff outer wall along which the flexible wall is movable, wherein the unrolling part has a predetermined diameter variation and/or the flexible wall has a predetermined thickness variation so as to cause a desired development of force.